

 MULTImedia & NETworking	S.C. MultiNET S.R.L. Romania, Baia Mare, Bd. Unirii Nr.11 A/J, Cod: 430271 Tel. 0262-222201, Fax: 0262-220729 arpi@multinet.ro , www.videocapture.multinet.ro R.C.: J24 / 1183 / 1994, C.U.I.: RO 5783680	 CERTIFIED MANAGEMENT SYSTEM	 Certificat Nr. 7006 ISO 9001	 Certificat Nr. 2365 ISO 14001
	21 Ani de Buna Practica in MULTImedia&NETworking			

ProAV


Network Encoder



The **ProAV** Network Encoder is an encoding device for IP broadcasting. The source signal could be from Video Camera, STB, PC, TV etc. It can transfer the live program through the internet/LAN, and the output signals will be received by PC, phone and other mobile terminals. The **ProAV** lets you access your IP STB, PC or TV anywhere to watch your programs. Whether you are in your house or across the globe, you'll never miss a game or your favorite show. The device supports HDMI / YPbPr / S-Video / AV / USB input and encodes in MPEG 4 AVC / H.264 format, and then sends the IP signal output over UDP (multicast), RTP / RTSP, HTTP and HLS. The USB port is designed to record and save the encoded video (TS) in .ts files on USB Stick or Hard Disk and play it back through IP out to increase your content options.

FEATURES


- Easy setup
- Watch and control your live and recorded TV shows anywhere & anytime
- HLS protocol supporting 6-10 Apple terminals simultaneously running with different resolutions and bitrate settings
- USB port for video recording and playing back, increases signal source option
- HDMI / YPbPr / S-Video / AV / USB input
- IP Output over UDP (Unicast/multicast), RTP / RTSP, HTTP, HLS
- Absolutely no monthly fees
- Local or remote management

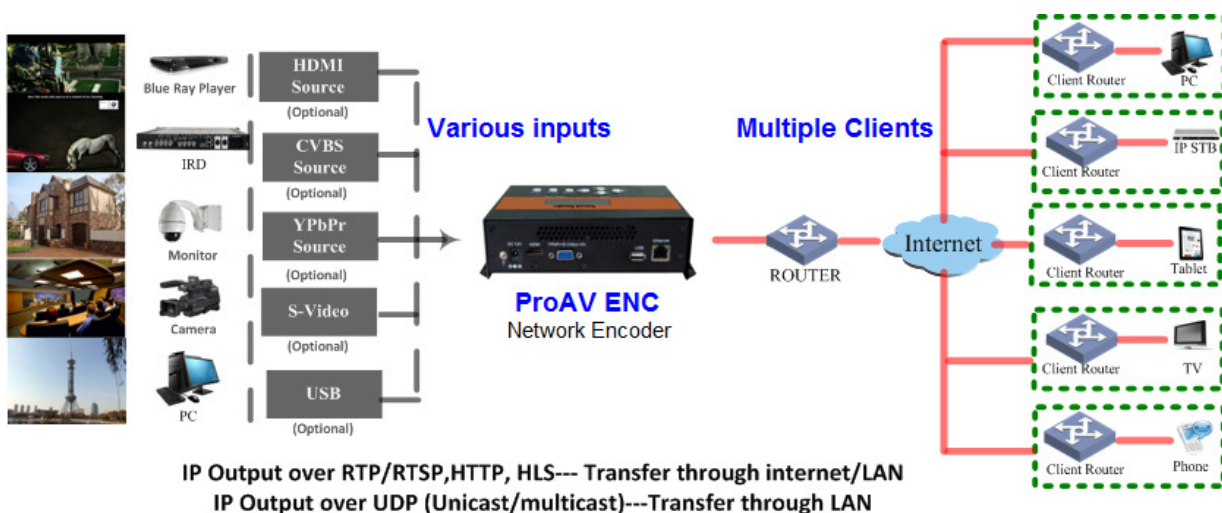





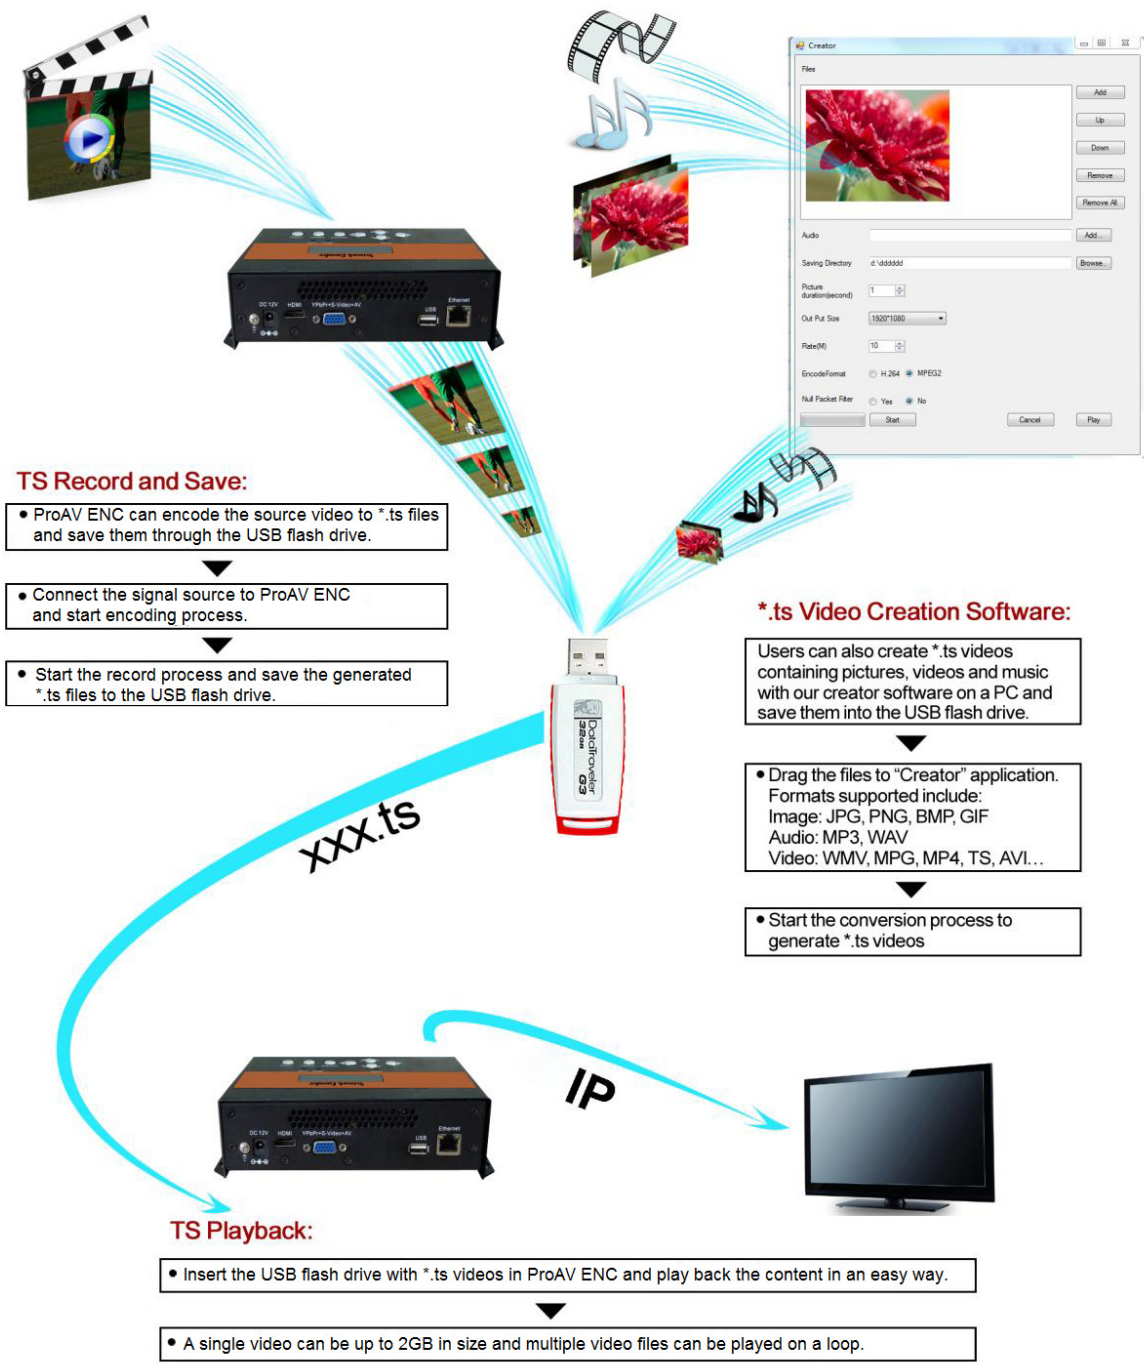

 IBM Advanced Business Partner 2015	 Lexmark Authorised Premium Partner 2015	 HP Silver Partner 2015	 Leading Innovation >>> Gold Partner Service&Sales 2015	 2014	 Digital Video Solutions Dealer Autorizat
--	---	--	--	--	--

	S.C. MultiNET S.R.L. Romania, Baia Mare, Bd. Unirii Nr.11 A/J, Cod: 430271 Tel. 0262-222201, Fax: 0262-220729 arpi@multinet.ro , www.videocapture.multinet.ro R.C.: J24 / 1183 / 1994, C.U.I.: RO 5783680			
21 Ani de Buna Practica in MULTImedia & NETworking	IBAN: RO87 BTRL 0250 1202 A485 12XX Baia Mare			

USB Recorder & Player









USB Flash Drive Specifications Required:
 • Standard: High Speed 2.0 • File System: FAT 32 • Memory: 32G is suggested

 IBM Advanced Business Partner 2015	 Lexmark Authorised Premium Partner 2015	 HP Silver Partner 2015	 TOSHIBA Leading Innovation >>> Gold Partner Service & Sales 2015	 Intel Technology Provider Gold 2014	 matrox Digital Video Solutions Dealer Autorizat
--	---	--	--	---	--

	S.C. MultiNET S.R.L. Romania, Baia Mare, Bd. Unirii Nr.11 A/J, Cod: 430271 Tel. 0262-222201, Fax: 0262-220729 arpi@multinet.ro , www.videocapture.multinet.ro R.C.: J24 / 1183 / 1994, C.U.I.: RO 5783680			
21 Ani de Buna Practica in MULTImedia&NETworking	IBAN: RO87 BTRL 0250 1202 A485 12XX Baia Mare			

SPECIFICATIONS

Encoder Section	HDMI input	Video	Resolution	1920x1080_60p, 1920x1080_50p 1920x1080_60i, 1920x1080_50i 1280x720_60p, 1280x720_50p
			Encoding	MPEG-4 AVC/H.264
			Bit rate	1Mbps~19Mbps
		Audio	Encoding	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC
			Sampling rate	48KHz
			Bitrate	64, 96, 128, 192, 256, 320, 384kbps
	YPbPr/CVBS/S-Video (with an adapter to VGA)	Video	Encoding	MPEG-4 AVC/H.264
			Interface	CVBS *1, YPbPr*1, S-Video*1
			Resolution	CVBS & S-Video: 720x576_50i (PAL); 720x480_60i (NTSC) YPbPr: 1920*1080_60i, 1920*1080_50i; 1280*720_60p, 1280*720_50P
		Audio	Bit rate	1Mbps~19Mbps
			Encoding	MPEG1 Layer II, MPEG2-AAC, MPEG4-AAC
			Interface	1*Stereo /2*mono
		Sample rate	48KHz	
		Bit rate	64, 96,128, 192, 256, 320, 384kbps	
Stream out	IP out over UDP (Unicast/multicast), RTP/RTSP, HTTP, HLS (RJ45, 1000M)			
System	Local control	LCD + control buttons		
	Remote control	Web-server NMS		
	Language	Chinese-English control interface		
	Upgrade	USB/Web-server		
General	Approx weight	≤1Kg		
	Operation temperature	0~45°C		
	Power supply	DC12V		
	Dimensions	183*110*45mm		

 IBM Advanced Business Partner 2015	 Lexmark Authorised Premium Partner 2015	 HP Silver Partner 2015	 Leading Innovation >>> Gold Partner Service&Sales 2015	 2014	 Digital Video Solutions Dealer Autorizat
--	---	--	--	--	--